

Asahi-Seiki Manufacturing Co., Ltd.


USF-PC2



CNC SPRING FORMING MACHINE

GREAT ADVANTAGE IN FORMING SQUARE WIRE
TOOLS ROTATE WITH NO TWISTING OF WIRE

CNC UNIVERSAL SPRING FORMER USE-PC2

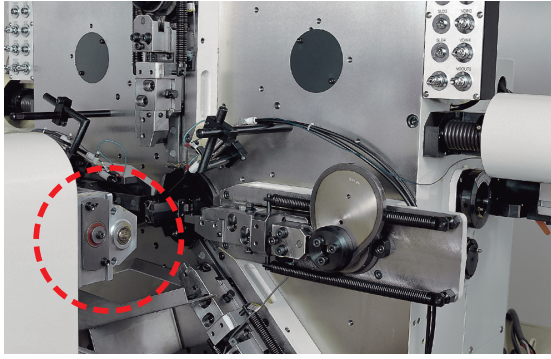

Universal Forming Unit Feature

Less tools and short setup time owing to UFU(Universal Forming Unit) that can form wire from any angle.

SPECIFICATIONS

Wire diameter (mm)	$\phi 0.6 \sim 2.0$		
Spring index (D/d)	4 or more		
External memory unit	USB Connector		
Display	Liquid-Crystal color monitor		
External dimensions (mm)	Height	2000	
	Width	1400	
	Depth	2400	
Weight (approx./kg)	1300		

AXIS CONSTRUCTION

EXAMPLE OF AXIS CONSTRUCTION

Axis	Use	Max. speed	Motor capacity (kW)
Z	Wire feed	90 m/min	2.0
C	Cam axis	150 rpm	2.0
I	Universal quill	300 rpm	0.75
U	Universal forming unit(rotation)	187.5 rpm	0.75
K	Universal forming unit(forming)	187.5 rpm	0.75
W	Universal forming unit (forward-backward)	30 m/min	0.75
X	Curling slide	300 rpm	0.75
Y	Servoslide	300 rpm	0.75
A	2nd hook forming unit(hooking)	300 rpm	0.75
B	2nd hook forming unit (transferring)	300 rpm	0.75

TOOL CHART

Name	Wire dia. (mm)														
	0.6	0.65	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.8	2.0	
Feed roll	2		2		2		2		2		2		2		
Quill liner (pair)	1		1		1		1		1		1		1		
Middle Liner (pair)	1		1		1		1		1		1		1		
Quill	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Mandrel - right	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Mandrel - left	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Universal body tool - right	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Universal body tool - left	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Universal forming tool - carbide pin type	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Universal forming tool - tool steel	1														
Cut off tool	2														

MACHINE CONSTITUTION

STANDARD ACCESSORIES

Universal forming unit	1set	Universal quill
Standard forming slide	2sets	Hook alignment device
Wire feeding section		Operation tool
Cam axis driving section		

OPTION

Additional standard forming slide	Additional hook alignment device
Curling slide	Products ejecting device
Servo slide	Universal curling head
2nd hook forming unit	



Head Office

5050-1 Shindenbora, Asahimae-cho, Owariasahi,
Aichi, 488-8655 Japan
TEL 0561-53-3119 FAX 0561-54-2439
Home page: <http://www.asahiseiki-mfg.co.jp>

Tokyo Branch

1-6-3 Yushima, Bunkyo-ku, Tokyo, 113-0034 Japan
TEL 03-5805-6991 FAX 03-5805-6992

Osaka Sales Office

1-13-41 Esaka-cho, Suita, Osaka, 564-0063 Japan
TEL 06-6368-6251 FAX 06-6368-6252